




NTN Bearing Rolamentos do Brasil Ltda.

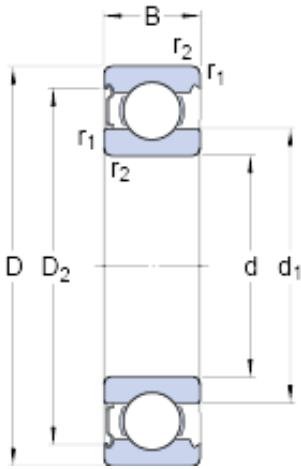

95 mm x 200 mm x 45 mm skf 6319-Z Deep groove ball bearings

Bearing No. 6319-Z

6319-Z Bearing 2D drawings and 3D CAD models

Size	200x95x45 mm
Bore Diameter	200 mm
Outer Diameter	95 mm
Width	45 mm
d	95 mm
D	200 mm
B	45 mm
d ₁	127.7 mm
D ₂	171.9 mm
r _{1,2} - min.	3 mm
d _a - min.	109 mm
d _a - max.	127 mm
D _a - max.	186 mm
r _a - max.	2.5 mm
Basic dynamic load rating - C	159 kN
Basic static load rating - C ₀	118 kN
Fatigue load limit - P _u	4.2 kN
Reference speed	7000 r/min
Limiting speed	4500 r/min
Calculation factor - k _r	0.03
Calculation factor - f ₀	13
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	SKF



NTN Bearing Rolamentos do Brasil Ltda.

Minimum Buy Quantity	N/A
Weight / Kilogram	5.812
EAN	7316570562880
Product Group	B00308
Enclosure	1 Metal Shield
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	95MM Bore; 200MM Outside Diameter; 45MM Outer Race Width; 1 Metal Shield; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Stee
Other Features	Deep Groove
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	6319-Z
Weight / LBS	12.8015
Bore	3.74 Inch 95 Millimeter
Outside Diameter	7.874 Inch 200 Millimeter
Outer Race Width	1.772 Inch 45 Millimeter



NTN Bearing Rolamentos do Brasil Ltda.

Inner Race Width	0 Inch 0 Millimeter
bore diameter:	95 mm
static load capacity:	118 kN
outside diameter:	200 mm
precision rating:	Not Rated
overall width:	45 mm
finish/coating:	Uncoated
bore type:	Round
cage material:	Steel
closure type:	Single Shield
outer ring width:	45 mm
row type & fill slot:	Single Row Non-Fill Slot
fillet radius:	2.5 mm
internal clearance:	C0
maximum rpm:	3600 RPM
dynamic load capacity:	159 kN
series:	63
d_1	127.7 mm
D_2	171.9 mm
$r_{1,2}$ min.	3 mm
d_a min.	109 mm
d_a max.	127 mm
D_a max.	186 mm
r_a max.	2.5 mm
Basic dynamic load rating C	159 kN
Basic static load rating C_0	118 kN
Fatigue load limit P_u	4.15 kN
Calculation factor k_r	0.03
Calculation factor f_0	13.3
Mass bearing	5.79 kg