




NTN Bearing Rolamentos do Brasil Ltda.

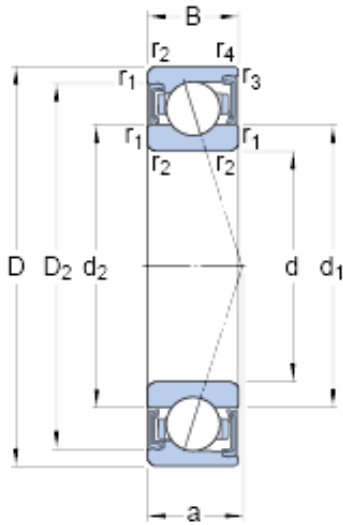

80 mm x 110 mm x 16 mm skf S71916
ACD/HCP4A Super-precision Angular contact
ball bearings

Bearing No. S71916 ACD/HCP4A

S71916 ACD/HCP4A Bearing 2D drawings and 3D
CAD models

Size	110x80x16 mm
Bore Diameter	110 mm
Outer Diameter	80 mm
Width	16 mm
d	80 mm
D	110 mm
B	16 mm
d ₁	89.2 mm
d ₂	89.2 mm
D ₂	103.74 mm
r _{1,2} - min.	1 mm
r _{3,4} - min.	0.3 mm
a	30.2 mm
d _a - min.	84.6 mm
d _a - max.	88.6 mm
d _b - min.	84.6 mm
d _b - max.	88.6 mm
D _a - max.	105 mm
D _b - max.	108 mm
r _a - max.	1 mm
r _b - max.	0.3 mm
Basic dynamic load rating - C	34.5 kN
Basic static load rating - C ₀	36.5 kN



NTN Bearing Rolamentos do Brasil Ltda.

Fatigue load limit - P_u	1.6 kN
Limiting speed for grease lubrication	12000 r/min
Ball - D_w	9.525 mm
Ball - z	27
Calculation factor - e	0.68
Calculation factor - Y_2	0.87
Calculation factor - Y_0	0.38
Calculation factor - X_2	0.41
Calculation factor - Y_1	0.92
Calculation factor - Y_2	1.41
Calculation factor - Y_0	0.76
Calculation factor - X_2	0.67
Preload class A - G_A	220 N
Preload class B - G_B	440 N
Preload class C - G_C	880 N
Preload class D - G_D	1760 N
Calculation factor - f	1.24
Calculation factor - f_1	0.98
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.07
Calculation factor - f_{2C}	1.12
Calculation factor - f_{2D}	1.17
Calculation factor - f_{HC}	1.04
Preload class A	226 N/micron
Preload class B	296 N/micron
Preload class C	397 N/micron
Preload class D	544 N/micron
d_1	89.2 mm



NTN Bearing Rolamentos do Brasil Ltda.

d_2	89.2 mm
D_2	103.74 mm
$r_{1,2}$ min.	1 mm
$r_{3,4}$ min.	0.3 mm
d_a min.	84.6 mm
d_a max.	88.6 mm
d_b min.	84.6 mm
d_b max.	88.6 mm
D_a max.	105 mm
D_b max.	108 mm
r_a max.	1 mm
r_b max.	0.3 mm
Basic dynamic load rating C	34.5 kN
Basic static load rating C_0	36.5 kN
Fatigue load limit P_u	1.56 kN
Attainable speed for grease lubrication	12000 r/min
Ball diameter D_w	9.525 mm
Number of balls z	27
Preload class A G_A	220 N
Static axial stiffness, preload class A	226 N/ μ m
Preload class B G_B	440 N
Static axial stiffness, preload class B	296 N/ μ m
Preload class C G_C	880 N
Static axial stiffness, preload class C	397 N/ μ m
Preload class D G_D	1760 N
Static axial stiffness, preload class D	544 N/ μ m
Calculation factor f	1.24
Calculation factor f_1	0.98
Calculation factor f_{2A}	1



NTN Bearing Rolamentos do Brasil Ltda.

Calculation factor f_{2B}	1.07
Calculation factor f_{2C}	1.12
Calculation factor f_{2D}	1.17
Calculation factor f_{HC}	1.04
Calculation factor e	0.68
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (single, tandem) Y_0	0.38
Calculation factor (single, tandem) X_2	0.41
Calculation factor (back-to-back, face-to-face) Y_1	0.92
Calculation factor (back-to-back, face-to-face) Y_2	1.41
Calculation factor (back-to-back, face-to-face) Y_0	0.76
Calculation factor (back-to-back, face-to-face) X_2	0.67
Mass bearing	0.32 kg