




NTN Bearing Rolamentos do Brasil Ltda.

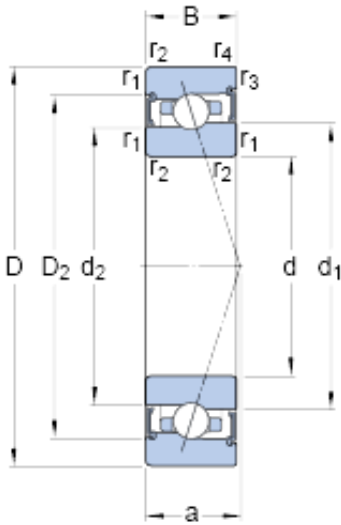

65 mm x 90 mm x 13 mm skf S71913
CB/HCP4A Super-precision Angular contact ball bearings

Bearing No. S71913 CB/HCP4A

S71913 CB/HCP4A Bearing 2D drawings and 3D CAD models

Size	90x65x13 mm
Bore Diameter	90 mm
Outer Diameter	65 mm
Width	13 mm
d	65 mm
D	90 mm
B	13 mm
d ₁	73.94 mm
d ₂	72.72 mm
D ₂	83.46 mm
r _{1,2} - min.	1 mm
r _{3,4} - min.	0.3 mm
a	20.1 mm
d _a - min.	69.6 mm
d _a - max.	73.3 mm
d _b - min.	69.6 mm
d _b - max.	72.1 mm
D _a - max.	85.4 mm
D _b - max.	88 mm
r _a - max.	1 mm
r _b - max.	0.3 mm
Basic dynamic load rating - C	10.6 kN
Basic static load rating - C ₀	9.5 kN



NTN Bearing Rolamentos do Brasil Ltda.

Fatigue load limit - P_u	0.4 kN
Limiting speed for grease lubrication	24000 r/min
Ball - D_w	5.556 mm
Ball - z	32
Calculation factor - f_0	9.9
Preload class A - G_A	35 N
Preload class B - G_B	70 N
Preload class C - G_C	210 N
Calculation factor - f	1.13
Calculation factor - f	1
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.03
Calculation factor - f_{2C}	1.08
Calculation factor - f_{HC}	1.01
Preload class A	43 N/micron
Preload class B	56 N/micron
Preload class C	90 N/micron
d_1	73.94 mm
d_2	72.72 mm
D_2	83.46 mm
$r_{1,2}$ min.	1 mm
$r_{3,4}$ min.	0.3 mm
d_a min.	69.6 mm
d_a max.	73.3 mm
d_b min.	69.6 mm
d_b max.	72.1 mm
D_a max.	85.4 mm
D_b max.	88 mm
r_a max.	1 mm
r_b max.	0.3 mm



NTN Bearing Rolamentos do Brasil Ltda.

Basic dynamic load rating C	14.3 kN
Basic static load rating C_0	15.3 kN
Fatigue load limit P_u	0.4 kN
Attainable speed for grease lubrication	24000 r/min
Ball diameter D_w	5.556 mm
Number of balls z	32
Preload class A G_A	35 N
Static axial stiffness, preload class A	43 N/ μ m
Preload class B G_B	70 N
Static axial stiffness, preload class B	56 N/ μ m
Preload class C G_C	210 N
Static axial stiffness, preload class C	90 N/ μ m
Calculation factor f	1.13
Calculation factor f_1	1
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.03
Calculation factor f_{2C}	1.08
Calculation factor f_{HC}	1.01
Calculation factor f_0	9.9
Mass bearing	0.2 kg